

РОССИЙСКАЯ ФЕДЕРАЦИЯ СЕРТИФИКАТ СООТВЕТСТВИЯ

(обязательная сертификация)

№ C-CH.ПБ04.В.01361
(номер сертификата соответствия)

ТР 1371549
(учетный номер бланка)

ЗАЯВИТЕЛЬ ООО "ДЮПОН НАУКА И ТЕХНОЛОГИИ". Адрес: РОССИЯ, МОСКВА, 121614, УЛ.КРЫЛАТСКАЯ Д.17, корп.3. ОГРН: 1027710006059. Телефон +7 495 797-22-00.
(наименование и место-нахождение заявителя)

ИЗГОТОВИТЕЛЬ DUPONT DE NEMOURS INTERNATIONAL S.A. Адрес: 2, CHEMIN DU PAVILLON CH-1218 LE GRAND SACONNEX GENEVA, ШВЕЙЦАРИЯ. Телефон 41 22 717-5111. (Перечень предприятий-изготовителей см. Приложение 0253992)
(наименование и место-нахождение изготовителя продукции)

ОРГАН ПО СЕРТИФИКАЦИИ ФГБОУ ВПО Академия ГПС МЧС России. 129366, г. Москва, ул. Б.Галушкина, д.4, т/ф. (495)617-26-35. ОГРН: 1027739451684.
(наименование и местонахождение органа по сертификации, выдавшего сертификат соответствия)
Аттестат рег. № ТРПБ.RU.ПБ04 выдан 23.12.2011г. Министерство Российской Федерации по делам гражданской обороны, чрезвычайным ситуациям и ликвидации последствий стихийных бедствий.
ПОДТВЕРЖДАЕТ, ЧТО ПРОДУКЦИЯ

(информация об объекте сертификации, позволяющая идентифицировать объект)
КОМПОЗИТНЫЙ МАТЕРИАЛ "CORIAN®".
Серийный выпуск.

код ОК 005 (ОКП)
57 7210

СООТВЕТСТВУЕТ ТРЕБОВАНИЯМ ТЕХНИЧЕСКОГО РЕГЛАМЕНТА (ТЕХНИЧЕСКИХ РЕГЛАМЕНТОВ) Технический регламент о требованиях пожарной безопасности (Федеральный закон от 22.07.2008 N 123-ФЗ) и Федеральный закон от 10.07.2012 № 117-ФЗ О внесении изменений в Федеральный закон "Технический регламент о требованиях пожарной безопасности". Глава 3, Статья 13, Статья 146 п.7 (см. Приложение 0253993)
(наименование технического регламента (технических регламентов), на соответствие требованиям которого (которых) проводилась сертификация)

код ЕКПС

код ТН ВЭД России
3920 51 000 0

ПРОВЕДЕННЫЕ ИССЛЕДОВАНИЯ (ИСПЫТАНИЯ) И ИЗМЕРЕНИЯ Отчет по сертификационным испытаниям № 21/СТР-2013 от 18.03.2013 г. (ИЦ "Антип" ООО "НПФ "Антип", аттестат аккредитации № ТРПБ.RU.ИН13 от 25.08.2010г., 129366, г.Москва, ул. Б.Галушкина, д.4); Акт анализа состояния производства №1418/ТР-2013 от 06.03.2013г. (ОС Академия ГПС МЧС России).

ПРЕДСТАВЛЕННЫЕ ДОКУМЕНТЫ сертификат системы менеджмента качества ISO 9001:2008 № 10005110 QM08 от 30.01.2012 (UL DQS Inc.).
(документы, представленные заявителем в орган по сертификации в качестве доказательств соответствия продукции требованиям технического регламента (технических регламентов))

СРОК ДЕЙСТВИЯ СЕРТИФИКАТА СООТВЕТСТВИЯ с 21.03.2013 по 20.03.2018



Руководитель
(заместитель руководителя)
органа по сертификации
подпись, инициалы, фамилия

Б.Б. Серков

Эксперт (эксперты)
подпись, инициалы, фамилия

Р.Г. Акперов

РОССИЙСКАЯ ФЕДЕРАЦИЯ

ПРИЛОЖЕНИЕ

к СЕРТИФИКАТУ СООТВЕТСТВИЯ № С-СН.ПБ04.В.01361

(обязательная сертификация)

ТР 0253993
(учетный номер бланка)

Сведения о национальных стандартах (сводах правил), применяемых на добровольной основе для соблюдения требований технического регламента

Обозначение национального стандарта или свода правил	Наименование национального стандарта или свода правил	Подтверждаемые требования национального стандарта или свода правил
ГОСТ 30244-94	Материалы строительные. Метод испытаний на горючесть.	Группа горючести Г1
ГОСТ 30402-96	Материалы строительные. Метод испытаний на воспламеняемость.	Группа воспламеняемости В2
ГОСТ Р 51032-97	Материалы строительные. Метод испытания на распространение пламени.	Группа распространения пламени РП1
ГОСТ 12.1.044-89 п. 4.3	Система стандартов безопасности труда. Пожаровзрывоопасность веществ и материалов. Номенклатура показателей и методы их определения.	Материал относится к группе трудногорючих.
ГОСТ 12.1.044-89 п. 4.18	Система стандартов безопасности труда. Пожаровзрывоопасность веществ и материалов. Номенклатура показателей и методы их определения.	Материал с малой дымообразующей способностью (коэффициент дымообразования $D_m = 11 \text{ м}^2/\text{кг}$)
ГОСТ 12.1.044-89 п. 4.19	Система стандартов безопасности труда. Пожаровзрывоопасность веществ и материалов. Номенклатура показателей и методы их определения.	Материал медленно распространяющий пламя по поверхности (индекс распространения пламени $I = 4,9$)
ГОСТ 12.1.044-89 п. 4.20	Система стандартов безопасности труда. Пожаровзрывоопасность веществ и материалов. Номенклатура показателей и методы их определения.	Материал умеренноопасный по токсичности продуктов горения (показатель токсичности продуктов горения $H_d = 92 \text{ г/м}^3$)



Руководитель
(заместитель руководителя)
органа по сертификации
подпись, инициалы, фамилия

Эксперт (эксперты)
подпись, инициалы, фамилия

[Handwritten signature]
[Handwritten signature]

Б.Б. Серков

Р.Г. Акперов

РОССИЙСКАЯ ФЕДЕРАЦИЯ

ПРИЛОЖЕНИЕ

к СЕРТИФИКАТУ СООТВЕТСТВИЯ № С-СН.ПБ04.В.01361

(обязательная сертификация)

ТР 0253992

(учетный номер бланка)

Перечень предприятий-изготовителей продукции, на которую распространяется действие сертификата соответствия, входящих в состав транснациональной компании

Полное наименование предприятия-изготовителя	Адрес (место нахождения)
"YERKES PLANT"	SHERIDAN DRIVE & RIVER ROAD BUFFALO, NY, 14207, USA (США)
"DUPONT-MRC CO., LTD."	1-15-9, MINAMI-AOYAMA MINATO-KU, TOKYO, 107-0062 (ЯПОНИЯ)
"DUPONT KOREA LTD."	ULSAN CITY KYUNGSANG NAM DO 680-070 (РЕСПУБЛИКА КОРЕЯ)
"POLIFEN KIMYA SANAYI VE TIC. A.Ş."	ASAGI KIRAZCA MAHALLESİ, OKUL SOKAK NO 17, ARIFIYE, SAKARYA TURKEY (ТУРЦИЯ)



Руководитель
(заместитель руководителя)
органа по сертификации
подпись, инициалы, фамилия

Б.Б. Серков

Эксперт (эксперты)
подпись, инициалы, фамилия

Р.Г. Акперов

CERTIFICATE OF COMPLIANCE



**E.I. du Pont de
Nemours and Company
/ DuPont Building
Innovations
Corian® solid surfaces**

Restrictions:

UL 2818 - 2013 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Products tested in accordance with UL 2821 test method to show compliance to emission limits in UL 2818, Section 7.1.



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the UL E-Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.50	mg/m³
Formaldehyde	50-00-0	61.3 (50 ppb)	µg/m³
Total Aldehydes ^(B)	-	0.10	ppm
Particle Matter less than 10 µm ^(C)	-	50	µg/m³
4-Phenylcyclohexene	4994-16-5	6.5	µg/m³
Individual VOCs ^(D)	-	1/10th TLV	-

- ^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- ^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- ^(C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- ^(D) Allowable levels for chemicals not listed are derived from 1/10th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Environment

CERTIFICATE OF COMPLIANCE



E.I. du Pont de Nemours and Company / DuPont Building Innovations Corian® solid surfaces

Restrictions:

UL 2818 - 2013 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Building products and interior finishes are determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V.1.1-2010 using the applicable exposure scenario(s).

3143-420

Certificate Number

11/07/2006 - 11/07/2015

Certificate Period

Certified

Status



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the UL E-Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Gold Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m³
Particle Matter less than 10 µm ^(C)	-	20	µg/m³
1-Methyl-2-pyrrolidinone ^(D)	872-50-4	160	µg/m³
Individual VOCs ^(E)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C6 – C16 range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- (D) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day
- (E) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.1 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Environment

CERTIFICATE OF COMPLIANCE



E.I. du Pont de Nemours and Company / DuPont Building Innovations DuPont Surfaces Adhesives and Sealants

Restrictions:

UL 2818 - 2013 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Building products and interior finishes are determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V.1.1-2010 using the applicable exposure scenario(s).

3151-420

Certificate Number

11/07/2006 - 11/07/2015

Certificate Period

Certified

Status



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the UL E-Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Gold Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.22	mg/m³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m³
Total Aldehydes ^(B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m³
Particle Matter less than 10 µm ^(C)	-	20	µg/m³
1-Methyl-2-pyrrolidinone ^(D)	872-50-4	160	µg/m³
Individual VOCs ^(E)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C6 – C16 range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- (D) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day
- (E) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.1 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Environment

CERTIFICATE OF COMPLIANCE



E.I. du Pont de Nemours and Company / DuPont Building Innovations DuPont Surfaces Adhesives and Sealants

Restrictions:

UL 2818 - 2013 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

3151-410

Certificate Number

11/07/2006 - 11/07/2015

Certificate Period

Certified

Status



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the UL E-Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

Products tested in accordance with UL 2821 test method to show compliance to emission limits in UL 2818, Section 7.1.



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the UL E Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.50	mg/m³
Formaldehyde	50-00-0	61.3 (50 ppb)	µg/m³
Total Aldehydes ^(B)	-	0.10	ppm
Particle Matter less than 10 µm ^(C)	-	50	µg/m³
4-Phenylcyclohexene	4994-16-5	6.5	µg/m³
Individual VOCs ^(D)	-	1/10th TLV	-

- ^(A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- ^(B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- ^(C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- ^(D) Allowable levels for chemicals not listed are derived from 1/10th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Environment



**ТАМОЖЕННЫЙ СОЮЗ
РЕСПУБЛИКИ БЕЛАРУСЬ, РЕСПУБЛИКИ КАЗАХСТАН
И РОССИЙСКОЙ ФЕДЕРАЦИИ**

Управление Роспотребнадзора по Смоленской области
Главный государственный санитарный врач (заместитель главного государственного санитарного
врача)
Смоленская область

(уполномоченный орган Стороны, руководитель уполномоченного органа, наименование административно-территориального образования)


**СВИДЕТЕЛЬСТВО
о государственной регистрации**

№ RU 67 CO 01.008.E 005951.08.12

от 02.08.2012 г.

Продукция:

Двухкомпонентный клей (далее согласно приложению). Изготовлена в соответствии с документами нормами производителя. Изготовитель (производитель): "DuPont" 1007, Market Street, Wilmington, DE 19808, USA ("Дюпон" 1007, Маркет стрит, Уилмингтон, ДЕ 19808 США) Филиал: IPS Corporation, SCIGRIP Smarter Adhesive Solutions USA (АИПИЭС Корпорэйшн, ЭССИАИДЖИЭРАЙПИ Смартер Адгезив Солюшнз) (США). Получатель: "DuPont" 1007, Market Street, Wilmington, DE 19808, USA ("Дюпон" 1007, Маркет стрит, Уилмингтон, ДЕ 19808) (США).

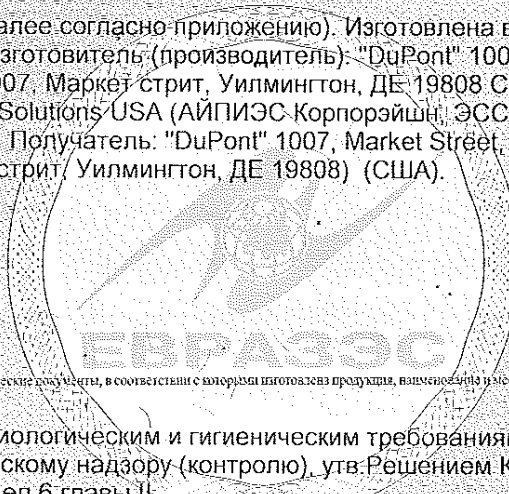

(наименование продукции, нормативные и (или) технические документы, в соответствии с которыми изготовлена продукция, наименование и место нахождения изготовителя (производителя), покупателя)

соответствует

Единым санитарно-эпидемиологическим и гигиеническим требованиям к товарам, подлежащим санитарно-эпидемиологическому надзору (контролю), утв. Решением Комиссии таможенного союза № 299 от 28.05.2010 г. раздел 6 главы II
прошла государственную регистрацию, внесена в Реестр свидетельств о государственной регистрации и разрешена для производства, реализации и использования
для использования при установке столешниц и раковин из искусственного камня

Настоящее свидетельство выдано на основании (перечислить рассмотренные протоколы исследований, наименование организации (испытательной лаборатории, центра), проводившей исследования, другие рассмотренные документы):

Протокол испытаний № 4/07-198 от 13.07.2012 г. ИЛ ООО "Микрон" (Атт. Аккр №ГСЭН.RU.ЦОА.764). Экспертное заключение ФБУЗ "Центр гигиены и эпидемиологии в Смоленской области" № 6505 от 27 июля 2012 года

Срок действия свидетельства о государственной регистрации устанавливается на весь период изготовления продукции или поставок подконтрольных товаров на территорию таможенного союза

Подпись, ФИО, должность уполномоченного лица, выдавшего документ, и печать органа (учреждения), выдавшего документ



(Ф. И. О. / Подпись)

№ 0218397





**ТАМОЖЕННЫЙ СОЮЗ
РЕСПУБЛИКИ БЕЛАРУСЬ, РЕСПУБЛИКИ КАЗАХСТАН
И РОССИЙСКОЙ ФЕДЕРАЦИИ**

Управление Роспотребнадзора по Смоленской области
Главный государственный санитарный врач (заместитель главного государственного санитарного
врача)
Смоленская область

(уполномоченный орган Стороны, руководящий уполномоченного органа, наименование административно-территориального образования)

**ПРИЛОЖЕНИЕ
К СВИДЕТЕЛЬСТВУ О ГОСУДАРСТВЕННОЙ РЕГИСТРАЦИИ**

№ RU.67.CO.01.008.E.005951.08.12 ОТ 02.08.2012 г.

(информация, не вошедшая в текст свидетельства о государственной регистрации)

Наименование продукции (продолжение, начало на бланке свидетельства):

Двухкомпонентный клей CORIAN, Corian Joint Adhesive Color Anthracite, Corian Joint Adhesive Color ANTIQUE AMETHYST, Corian Joint Adhesive Color Atlantis, Corian Joint Adhesive Color AUTUMN LEAVES, Corian Joint Adhesive Color Aztec Gold, Corian Joint Adhesive Color Azure (Dark Blue), Corian Joint Adhesive Color Beach Glass, Corian Joint Adhesive Color Bone, Corian Joint Adhesive Color Bougainvillea, Corian Joint Adhesive Color Bronze Patina, Corian Joint Adhesive Color Butter Cream, Corian Joint Adhesive Color Cameo White, Corian Joint Adhesive Color Cargo, Corian Joint Adhesive Color CINNABAR, Corian Joint Adhesive Color Coffee Bean, Corian Joint Adhesive Color COPPERITE, Corian Joint Adhesive Color Dasty Rose, Corian Joint Adhesive Color Dawn Beige, Corian Joint Adhesive Color Dove, Corian Joint Adhesive Color Dune, Corian Joint Adhesive Color Flint, Corian Joint Adhesive Color Glacier White, Corian Joint Adhesive Color Gravel, Corian Joint Adhesive Color Gray Fieldstone, Corian Joint Adhesive Color Green Grape, Corian Joint Adhesive Color Hot (Red), Corian Joint Adhesive Color Jewel, Corian Joint Adhesive Color Light Green, Corian Joint Adhesive Color Mandarin (Orange), Corian Joint Adhesive Color Marine Blue, Corian Joint Adhesive Color Medea, Corian Joint Adhesive Color NATURAL GREY, Corian Joint Adhesive Color Neutral, Corian Joint Adhesive Color Nocturne (Black), Corian Joint Adhesive Color OLIVITE, Corian Joint Adhesive Color Peach, Corian Joint Adhesive Color Pearl Gray, Corian Joint Adhesive Color Pompeii Red, Corian Joint Adhesive Color Raffia, Corian Joint Adhesive Color Sage, Corian Joint Adhesive Color Sand, Corian Joint Adhesive Color Sienna Brown, Corian Joint Adhesive Color Silt, Corian Joint Adhesive Color STONE HARBOR, Corian Joint Adhesive Color Summer Sky, Corian Joint Adhesive Color Taupe, Corian Joint Adhesive Color Translucent White, Corian Joint Adhesive Color Tumbled Glass, Corian Joint Adhesive Color Whitecap, Corian Joint Adhesive Color WILLOW, Corian Joint Adhesive Color Distinct Tan, Corian Joint Adhesive Color Elegant Gray, Corian Joint Adhesive Color Ethereal Azure, Corian Joint Adhesive Color Noble Ecru, Corian Joint Adhesive Color Serpentine, Corian Joint Adhesive Color Athena Gray, Corian Joint Adhesive Color Silver Gray, Corian Joint Adhesive Color Beryl Blue, Corian Joint Adhesive Color Diamond Blue, Corian Joint Adhesive Color Deep Gray, Corian Joint Adhesive Color Grand Brown, Corian Joint Adhesive Color Blooming Green, Corian Joint Adhesive Color Chic Aubergine, Corian Joint Adhesive Color Imperial Yellow, Corian Joint Adhesive Color Royal Red, Corian Joint Adhesive Color Absolute Beige, Corian Joint Adhesive Color Citrus Orange



Подпись, ФИО, должность уполномоченного лица, выдавшего документ, и печать органа (учреждения), выдавшего документ



CERTIFICATE OF COMPLIANCE



E.I. du Pont de Nemours and Company DuPont Building Innovations DuPont Surfaces Adhesives and Sealants

3151-420

Certificate Number

11/07/2006 - 11/07/2014

Certificate Period

Certified

Status

Restrictions:

UL 2818 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Building products and Interior finishes are determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010 using the applicable exposure scenario(s).



Environment

UL Environment investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL Environment and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Environment Mark for the identified Product(s) manufactured at the production site(s) covered by the ULE Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Gold Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	220	µg/m³
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m³
Total Aldehydes ^(B)	-	0.43	ppb
4-Phenylcyclohexene	4994-16-5	6.5	µg/m³
Particle Matter less than 10 µm ^(C)	-	20	µg/m³
1-Methyl-2-pyrrolidinone ^(D)	872-50-4	160	µg/m³
Individual VOCs ^(E)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- (D) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m³/day
- (E) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.1 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Environment